



GILBERT
FORESTRY

3000L SERIES FELLING HEADS



GILBERT OFF-ROAD
FORESTRY
SAWMILLING
CONSTRUCTION

Tel. 1 418.275.5041
Fax 1 418.275.2624
info@gilbert-tech.com

1840, boul. Marcotte
Roberval (Qc) G8H 2P2
www.gilbert-tech.com




FEATURES AND BENEFITS:

- ✓ The innovative geometry allows an accumulation of more trees in tight, straight bunches without breaking any stems, no matter the sizes.
- ✓ The heavy duty design ensures maximum performance in hard wood as well as in multi-stem wood.
- ✓ Gilbert unique and exclusive saw stops protect the saw drive system and the saw disc against impact and gyroscopic deflection which increases the lifetime.
- ✓ The powerful 350 degree wrist is strong enough to handle any size of timber (even West Coast timber).
- ✓ The unique conical base is designed to facilitate clearance for fast saw recovery.
- ✓ Gilbert bolted saw drive system allows easy maintenance and increases uptime.
- ✓ The wide front throat opening accommodates butt flare.
- ✓ The access to hydraulic components is easy for safe and fast maintenance.
- ✓ Gilbert felling head excels in thinning, blown down, select and final cut applications.
- ✓ Gilbert felling head ensures that the bunches are optimized for the skidder.

INCREASE YOUR PRODUCTIVITY

Imagine all trees stacked perfectly with one head, in one operation, all at once. Imagine a felling head that does it all. Increase your productivity with a felling head offering an above standard accumulation and an impeccable grouping of trees. Intended for a full range of logging operations, the 3000L Series is available in 18, 22, 24 and 28 in cutting size with the most recognized high rotation wrists in the industry.


SPECIFICATIONS

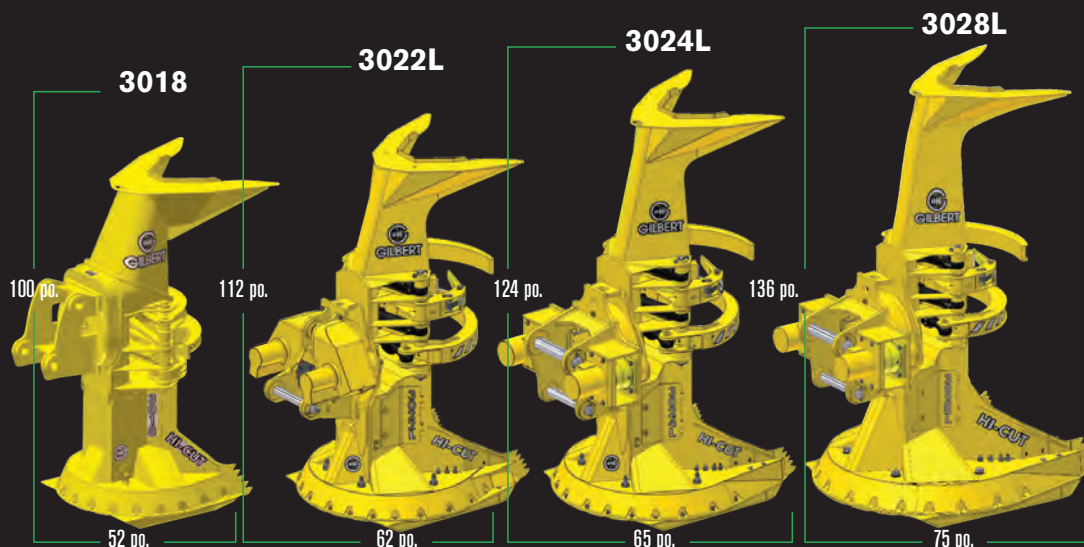

	3018	3022L	3024L	3028L
Cutting capacity	18 in. (457 mm)	21.50 in. (546 mm)	23.5 in. (597 mm)	27.5 in. (706 mm)
Saw blade	45 in. (1143 mm)	53 in. (1346 mm)	56 in. (1422 mm)	66 in. (1676 mm)
Accumulating area	3.4 ft ² (0.28 m ²)	4.53 ft ² (0.43 m ²)	5.0 ft ² (0.47 m ²)	6.3 ft ² (0.59 m ²)
Max. front opening	35.4 in. (899 mm)	57.5 in. (1461 mm)	59 in. (1499 mm)	59 3/4 in. (1578 mm)
Weight				
High rotation wrist (350°)	4300 lbs (1950 kg)	6500 lbs (2955 kg)	7550 lbs (3431 kg)	8300 lbs (3773 kg)
High rotation wrist (40°)		5800 lbs (2636 kg)	7000 lbs (3182 kg)	7800 lbs (3545 kg)

*These specifications are subject to change without notice.

Standard 350 degree wrist



Optional 40 degree wrist

